

SENTINEL™
YOUR KEY TO NDT

8 8 0

S E R I E S S O U R C E P R O J E C T O R



150Ci

130Ci

50Ci

15Ci



DELTA

SIGMA

ELITE

OMEGA



QSA GLOBAL

880

SERIES SOURCE PROJECTOR


DELTA 150 Ci

The lightest 150 Ci device currently available

Applications

Model 880 series source projectors are used for industrial applications of gamma radiography, mainly with Iridium-192, to inspect materials and structures in the density range of approximately 2.71g/cm³ through 8.53g/cm³. Low energy isotopes can be accommodated to permit radiography of materials and structures of thin sections of steel and low-density alloys.

The 880 series exposure devices are also designed for use with low activity sources with high photon energies for mass absorption (gamma scanning) studies of high-density materials up to 18.7g/cm³.

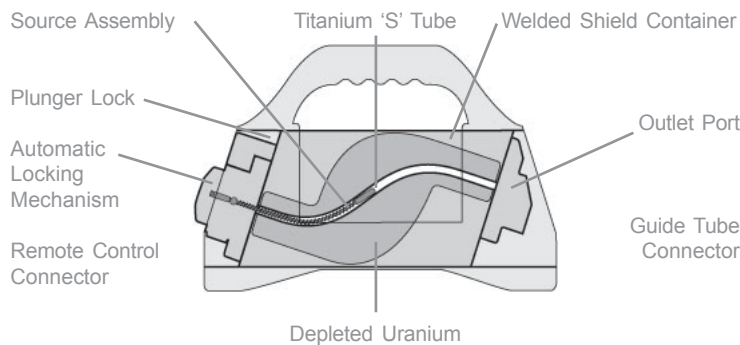

Comfortable carrying handle with slip-resistant contoured grip

Exposure Device


SENTINEL™ Model 880 Delta, Sigma, Elite and Omega source projectors are portable, lightweight and compact industrial radiographic exposure devices. The exposure device body consists of a titanium 'S' tube and cast Depleted Uranium (DU) shield contained within a 300 series stainless steel tube with stainless steel discs welded at each end forming a cylinder shaped housing. The discs are recessed to provide protection for the rear mounted locking mechanism and front mounted outlet port.

The horizontally oriented design allows the locking mechanism, source assembly connector and outlet port to be easily operated, simplifying the connection of source guide tubes and projection sheaths.

The internal void space of the housing is filled with rigid foam to prevent the ingress of water or foreign material, but is open to atmospheric pressure.

The exposure device body, containing the DU shield, locking mechanism, outlet port, protective covers and required labels, comprises the radioactive material transport Type B package*.

The welded main body houses the source assembly safely stored inside a titanium 'S' tube within a depleted uranium shield

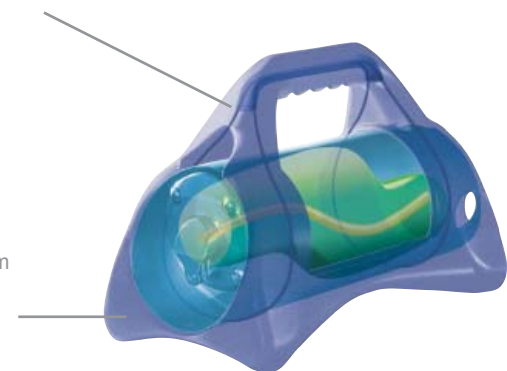

Resilient one-piece plastic jacket protects the main body, outlet port, lock mechanism and labels from wear and accidental damage

Shaped base and feet, and low center of gravity provide greater stability on convex and concave surfaces

The exposure device, alone, continues to be a compliant Type B package even if the jacket has been removed



*880 Omega is a Type A package only.

SIGMA 130 Ci

Optimized for use with industry-standard Ir-192 and Se-75 source activities

ELITE 50 Ci

Ideal for use with low-energy isotopes and lower activity Ir-192 sources

OMEGA 15 Ci

Designed to minimize weight and maximize offshore capability with Ir-192 and Se-75

Se-75 Ir-192 Co-60 Yb-169



Removable Jacket

An impact resistant plastic jacket surrounds the exposure device to protect labels and provide the means for carrying and placement during radiographic operations. The jacket incorporates a contoured handle and a quadruped base for stable positioning.

The four models are differentiated by device labels and jacket color; yellow for the 880 Delta, black for the 880 Sigma, blue for the 880 Elite, and orange for the 880 Omega.



Lock slide is easily reset with fingertip



Guide Tube Interface

Unique outlet port design simplifies the guide tube connection/disconnection without an elevation of radiation levels, and prevents the source assembly from being projected unless a guide tube is safely attached. An integral outlet port shield minimizes operator hand dose in compliance with ISO 3999, thus eliminating the need for an additional shipping plug.

Control Interface

The locking mechanism prevents unintentional remote control operation and automatically secures the source assembly in the locked and fully shielded position when fully retracted into the device.

Disconnection of the remote control is prevented unless the source assembly is fully secured and shielded.

Sales

SENTINEL™
QSA Global, Inc.
6765 Langley Drive
Baton Rouge, Louisiana 70809
USA

Telephone +1 225 751 5893
Toll Free +1 800 225 1383
Fax +1 225 756 0365 or
+1 225 751 8082

Manufacturing

SENTINEL™
QSA Global, Inc.
40 North Avenue
Burlington, Massachusetts 01803
USA

Telephone +1 781 272 2000
Toll Free +1 800 815 1383
Fax +1 781 273 2216

Email sales@SENTINELNDT.com

Website www.SENTINELNDT.com



All goods and services are sold subject to the terms and conditions of QSA Global, Inc. A copy of these terms and conditions is available upon request.

SENTINEL® is a registered trademark of QSA in USA, Canada, South Korea, and Europe.

All brand names and product names where used are acknowledged to be trademarks of their respective holders.

© 2007 QSA Global, Inc.

Technical Specifications

880 Model Series Delta Sigma Elite Omega					
Primary Application Industrial Gamma Radiography					
Dimensions (All Models)			Weight		
Length	13.33in(33.8cm)	Delta	52 lb (23.6kg)		
Width	7.5in (19.1cm)	Sigma	52 lb (23.6kg)		
Height	9 in (22.9cm)	Elite	42 lb (19.0kg)		
		Omega	33 lb (15.0kg)		
Activity of Depleted Uranium Shield Delta 5.4mCi (200MBq), Sigma 5.4mCi (200MBq), Elite 3.8mCi (141MBq), Omega 2.7mCi (101MBq)					
Certification		Delta, Sigma, Elite Type B(U) package, USNRC & USDOT Certification Number USA/9296/B(U)-96 Type B(U) package, CNSC CDNE199/-96 Omega Type A transport package, 49CFR173.415 and IAEA TS-R-1 (1996 Revised)			
Accreditation SENTINEL™ 880 Delta, Sigma, Elite, and Omega models are designed, tested and manufactured to meet the requirements of ANSI N432-1980, ISO 3999-1 2000E, IAEA TS-R-1 (1996), USNRC 10CFR34, 10CFR71, 49CFR173, MA-1059-D-334-S and CNSC R-061-0001-0-2012*. Additionally, the exposure devices are designed, manufactured and serviced under a QA program that has been accredited to ISO 9001 (2000) and approved in accordance with USNRC 10CFR71, Subpart H. The QA program also includes the reporting requirements of USNRC 10CFR21 for suppliers of source and byproduct materials. *Omega is not included in MA-1059-D-334-S and CNSC R-061-0001-0-2012					
Construction Exposure Device Depleted Uranium (DU) shield encased within a welded tubular stainless steel shell with stainless steel end plates and stainless steel investment castings. Interior void space filled with rigid foam.					
Removable Jacket One-piece, high impact resistant, plastic jacket incorporating a carrying handle and base.					
Materials Titanium 'S' Tube, DU Shield, Stainless Steel Tubular Shell and Plates, Aluminum, Brass, Tungsten, and Polyurethane					
Source Assembly and Authorized Contents USNRC Model Number: A424-9 source assembly with a double encapsulated Ir-192 sealed source. The IAEA/USDOT Special Form Certificate number is USA/0335/S. In addition, the following isotopes may also be utilized in the 880 series exposure devices. Se-75 (USA/0502/S-96), Co-60 (USA/0165/S-96), Yb-169 (USA/0597/S-96), Cs-137 (USA/0335/S-96)					
Isotope	Se-75	Ir-192	Co-60	Yb-169	Cs-137
Assembly Model Number	A424-25W	A424-9	A424-19	91810	A424-30
Gamma Energy Range	66-401keV	206-612keV	1.17-1.33MeV	8-308keV	N/A
Half-Life	120 Days	74 Days	5.27 Years	32 Days	30 Years
Approximate Steel Working Thickness	3-29mm	12-63mm	50-150mm	2-20mm	N/A
Device/Source Maximum Capacity					
880 Delta	150Ci 5.55TBq	150Ci 5.55TBq	65mCi 2.40GBq	20Ci 0.74TBq	380mCi 14GBq
880 Sigma	150Ci 5.55TBq	130Ci 4.81TBq	25mCi 925MBq	20Ci 0.74TBq	380mCi 14GBq
880 Elite	150Ci 5.55TBq	50Ci 1.85TBq	25mCi 925MBq	20Ci 0.74TBq	380mCi 14GBq
880 Omega	80Ci 3.00TBq	15Ci 0.55TBq	N/A	30Ci 1.11TBq	N/A
Controls and Guide Tubes Compatible with standard, and extreme remote controls and source guide tubes.					
Inspection Requirements Daily pre-operational inspection for obvious damage to the system. See device operation and maintenance manual for detailed maintenance requirements.					
Maintenance Requirements Most national regulations require inspection and maintenance of the system at quarterly intervals. The complete annual servicing ensures the integrity of the system. Shorter frequencies of inspection and maintenance are required when the system is operated under severe operating environments. In some cases, the system should be serviced immediately after certain jobs in severe environmental working conditions. See device operation and maintenance manual for detailed maintenance requirements.					
Patent Numbers	United States	Canada	Europe	Korea	
880	6781114	2425905 (Pending)	1325501B	10-2002-700482 (Pending App. No.)	
Jacket	D453570S	N/A	N/A	N/A	
Operating Temperature Range -40°F to 300°F (-40°C to 149°C)					

BRO001 SEPTEMBER 2007



QSA GLOBAL